


Bugle Head

Fine Thread Drywall Screws

Self-Tapping Screws



Fine Thread Drill Point Drywall Screw

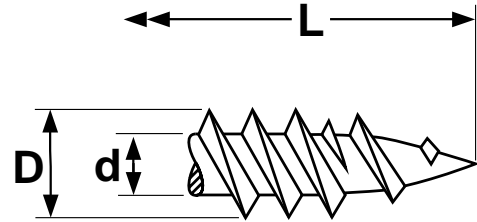

Fine Thread Sharp Point Drywall Screw

THREADS FOR FINE THREAD DRYWALL SCREWS					
Screw Size	Threads per inch	D		d	
		Major Diameter		Minor Diameter	
		Max.	Min.	Max.	Min.
6	18	.144	.135	.102	.096
7	16	.156	.147	.113	.106
8	15	.170	.161	.123	.116
10	14	.201	.193	.158	.152
Tolerance on Length		Up to 1 in. incl.: -0, +0.060		Over 1 in.: -0, +0.100	

Description	<p><i>Fine thread Drywall--Sharp point:</i> A bugle head screw with twinfast thread, extra sharp point and black phosphate finish.</p> <p><i>Fine thread Drywall--Drill point:</i> A bugle head screw with twin lead spaced thread, self drilling point and black phosphate finish.</p>
Applications/ Advantages	<p><i>Fine thread Drywall--Sharp point:</i> For attaching drywall to metal studs from 25 gage through 20 gage thick. Longer sizes are ideal for multiple layers or insulation.</p> <p><i>Fine thread Drywall--Drill point:</i> Will drive easily through drywall, drill a hole in a steel stud up to 14 gage thick, and form its own mating thread. Can also be used for attaching plywood or insulation board to 14 gage metal.</p>
Material	AISI 1018 or equivalent steel
Heat Treatment	Screws shall be quenched in liquid and then tempered by reheating to 650°F minimum.
Case Hardness	Rockwell C44 minimum
Plating	See Appendix-A for information about the coating of drywall screws.