


# TYPE-17 EXTERIOR—STAINLESS

Flat Head w/  
Six-Lobe Recess

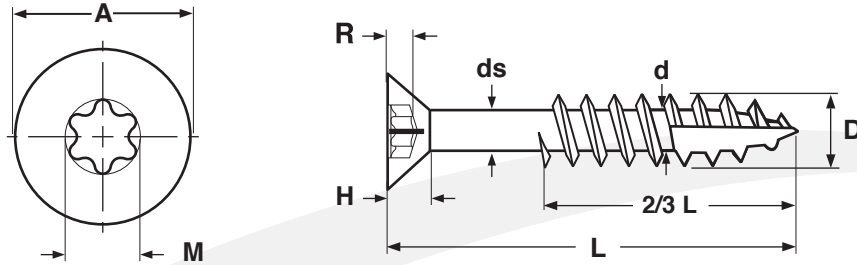

**FLAT SIX-LOBE RECESS EXTERIOR SCREW WITH TYPE-17 POINT—STAINLESS**

| Nominal Diameter    | A                 |       | H           | R            |       | M               | D              |       | d              |       | ds                   | Recess Size |
|---------------------|-------------------|-------|-------------|--------------|-------|-----------------|----------------|-------|----------------|-------|----------------------|-------------|
|                     | Head Diameter     |       | Head Height | Recess Depth |       | Recess Diameter | Major Diameter |       | Minor Diameter |       | Upper Shank Diameter |             |
|                     | Max               | Min   | Ref         | Max          | Min   | Ref             | Max            | Min   | Max            | Min   | Ref                  |             |
| 6                   | 0.275             | 0.247 | 0.083       | 0.059        | 0.051 | 0.132           | 0.162          | 0.153 | 0.101          | 0.092 | 0.114                | T-15        |
| 8                   | 0.328             | 0.295 | 0.100       | 0.075        | 0.062 | 0.155           | 0.181          | 0.172 | 0.112          | 0.104 | 0.126                | T-20        |
| 10                  | 0.381             | 0.335 | 0.116       | 0.087        | 0.074 | 0.178           | 0.203          | 0.190 | 0.128          | 0.119 | 0.141                | T-25        |
| 12                  | 0.433             | 0.392 | 0.131       | 0.102        | 0.082 | 0.195           | 0.238          | 0.225 | 0.154          | 0.145 | 0.169                | T-27        |
| Tolerance on Length | Up to 1.25"       |       |             |              |       |                 | +0 / -0.05"    |       |                |       |                      |             |
|                     | Over 1.25 to 2.5" |       |             |              |       |                 | +0 / -0.06"    |       |                |       |                      |             |
|                     | Over 2.5 to 4"    |       |             |              |       |                 | +0 / -0.09"    |       |                |       |                      |             |

|                                  |   |
|----------------------------------|---|
| <b>Description</b>               | An externally threaded fastener with a countersunk head, six-lobed recess, a single lead thread. The shank has a reduced diameter and a chip cavity cut out where the final several threads end at the tip. |
| <b>Applications / Advantages</b> | The deeper thread design offers greater resistance to pull-out forces. The six-lobe recess transmits drive torque with less required downward pressure.   |
| <b>Material</b>                  | 18-8 Stainless  |
| <b>Plating</b>                   | Stainless Exterior screws typically are provided without any additional supplemental finish.  |