


High-Low Style **THREAD FORMING**

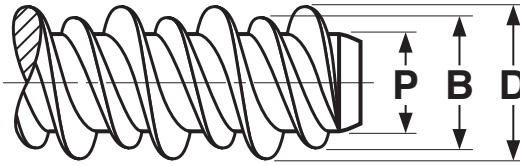


| THREAD AND HOLE DIMENSIONS FOR HIGH-LOW THREAD FORMING SCREWS | | | | | | Elco*, ASME B18.6.3 |
|---------------------------------------------------------------|-------------------------|------------------------|--------------------------------------|----------------------------------------------------|------------------------------|---------------------------------------------------------------------|
| Screw Size | D | B | P | Pilot Hole Diameter Flexural Modulus of Plastic | | Minimum Torsional Strength, lb. in. (STEEL SCREWS ONLY) |
| | High Thread Diameter | Low Thread Diameter | Point Diameter | Up to 200,000 P.S.I. | 200,000-400,000 P.S.I. | |
| 2-32 | .084 - .090 | .069 | .050 - .058 | .0670 | .0700 | - |
| 3-28 | .095 - .105 | .078 | .057 - .065 | .0730 | .0781 | - |
| 4-24 | .105 - .115 | .086 | .061 - .070 | .0810 | .0860 | 4 |
| 5-20 | .119 - .125 | .100 | .073 - .082 | .0935 | .0995 | 9 |
| 6-19 | .135 - .145 | .108 | .080 - .090 | .1015 | .1100 | 13 |
| 7-19 | .148 - .158 | .130 | .089 - .100 | .1200 | .1250 | 18 |
| 8-18 | .160 - .170 | .130 | .095 - .105 | .1200 | .1285 | 18 |
| 10-16 | .185 - .195 | .145 | .099 - .110 | .1360 | .1440 | 30 |
| 12-16 | .210 - .220 | .167 | .125 - .137 | .1570 | .1660 | 39 |
| 1/4-15 | .250 - .260 | .200 | .161 - .175 | .1890 | .2010 | 56 |
| 5/16-14 | .307 - .317 | .250 | .200 - .212 | .2380 | .2500 | 142 |
| Tolerance on Length | | | Up to 1 in., Incl.: +0, -3/64 | | Over 1 in.: +0, -1/16 | |

| | |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | A thread forming screw with a double-lead, consisting of a high and low thread. The lower thread varies in height from 1/3 to 1/2 that of the higher thread, which is sharper and flatter than a standard thread. |
| Applications/ Advantages | For use in plastic, nylon, wood or other low-density materials. Thread design reduces driving torques, enhances resistance to thread stripping, improves pullout strength and lessens risk of cracking the work piece. |
| Material | Steel: 1019-1022 or equivalent steel. Stainless: 410 martensitic or 18-8 austenitic stainless steel |
| Heat Treatment | Steel: Screws shall be quenched in liquid and then tempered by reheating to 650°F minimum. 410 Stainless: Screws shall be annealed by heating to 1850-1950°F, held at least 1/2 hour and rapid air- or oil-quenched then reheating to 525°F minimum for at least 1 hour and air cooled to provide the required tensile, yield and hardness properties. |
| Case Hardness | Steel: Rockwell C45 minimum |
| Case Depth (steel) | No. 2 thru 6 diameter: .002 - .007 No. 8 thru 12 diameter: .004 - .009 1/4" diameter and larger: .005 - .011 |
| Core Hardness | Steel (after tempering): Rockwell C28 - 36 410 Stainless (after tempering): Rockwell C38 - 42 18-8 Stainless: Rockwell B100 (approximate) |
| Plating | See Appendix-A |


* Elco is the original writer of high-low screw dimensions

HEAD DIMENSIONS High-Low Style


| HEAD & DRIVE DIMENSIONS FOR PHILLIPS FLAT HIGH-LOW | | | | | | | | |
|----------------------------------------------------|---------------|------|-------------|-----------------|------|---------------------------------|------|-------------|
| Nominal Size | A | | H | M | | G | | Driver Size |
| | Head Diameter | | Head Height | Recess Diameter | | Recess Penetration Gaging Depth | | |
| | Max | Min | Ref | Max | Min | Max | Min | |
| 2 | .162 | .144 | .051 | .102 | .089 | .056 | .040 | 1 |
| 4 | .212 | .191 | .067 | .128 | .115 | .082 | .066 | 1 |
| 6 | .262 | .238 | .083 | .174 | .161 | .095 | .072 | 2 |
| 8 | .312 | .285 | .100 | .189 | .176 | .110 | .087 | 2 |
| 10 | .362 | .333 | .116 | .204 | .191 | .125 | .102 | 2 |
| 12 | .412 | .380 | .132 | .268 | .255 | .139 | .116 | 3 |
| 1/4 | .477 | .442 | .153 | .283 | .270 | .154 | .131 | 3 |

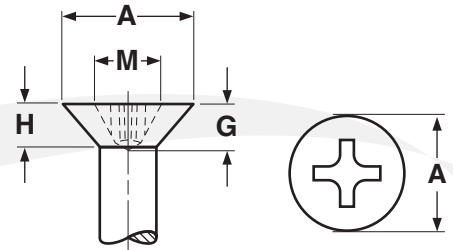


| HEAD & DRIVE DIMENSIONS FOR PHILLIPS FLAT UNDERCUT HIGH-LOW | | | | | | | | |
|-------------------------------------------------------------|---------------|------|-------------|------|-----------------|---------------------------------|------|-------------|
| Nominal Size | A | | H | | M | G | | Driver Size |
| | Head Diameter | | Head Height | | Recess Diameter | Recess Penetration Gaging Depth | | |
| | Max | Min | Max | Min | Ref | Max | Min | |
| 4 | .212 | .191 | .047 | .038 | .110 | .071 | .055 | 1 |
| 6 | .262 | .238 | .059 | .048 | .140 | .067 | .044 | 2 |
| 8 | .312 | .285 | .070 | .058 | .168 | .095 | .072 | 2 |
| 10 | .362 | .333 | .081 | .068 | .182 | .110 | .087 | 2 |

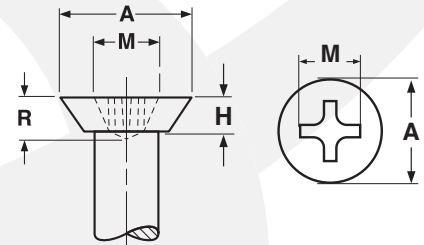

| HEAD & DRIVE DIMENSIONS FOR HEX WASHER HIGH-LOW | | | | | | | | | | | | |
|-------------------------------------------------|--------------------|------|------------|------|------------|------|----------------|------|--------------------|------|---------------------|------|
| Nominal Size | A | | T | | J | | H | | F | | U | |
| | Width Across Flats | | Slot Depth | | Slot Width | | Height of Head | | Diameter of Washer | | Thickness of Washer | |
| | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min |
| 4 | .125 | .120 | - | - | - | - | .055 | .044 | .177 | .163 | .016 | .010 |
| 6 | .187 | .181 | .049 | .030 | .043 | .035 | .070 | .058 | .260 | .240 | .025 | .015 |
| 8 | .250 | .244 | .053 | .033 | .048 | .039 | .093 | .080 | .328 | .302 | .025 | .015 |
| 10 | .250 | .244 | .074 | .052 | .054 | .045 | .110 | .096 | .432 | .398 | .031 | .019 |
| 12 | .312 | .305 | .103 | .077 | .067 | .056 | .155 | .139 | .432 | .398 | .039 | .022 |
| 1/4 | .375 | .367 | .111 | .083 | .075 | .064 | .190 | .172 | .520 | .480 | .050 | .030 |
| 5/16 | .375 | .367 | .111 | .083 | .075 | .064 | .190 | .172 | .520 | .480 | .050 | .030 |

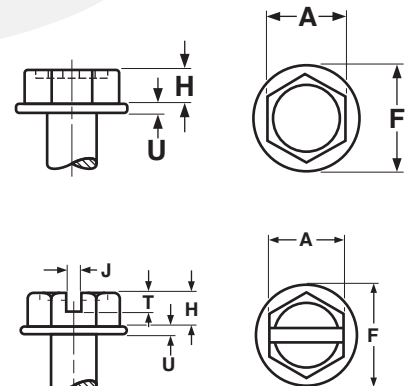


High-Low Style **HEAD DIMENSIONS**





HEAD & DRIVE DIMENSIONS FOR SIX-LOBE PAN HIGH-LOW SCREWS

| Nominal Size | A | | H | | R | G | | Fallaway Gauge Penetration | Driver Size |
|--------------|---------------|------|-------------|------|-----------------|--------------------------|------|----------------------------|-------------|
| | Head Diameter | | Head Height | | Recess Diameter | Recess Gauge Penetration | | | |
| | Max | Min | Max | Min | Ref | Min | Max | | |
| 2 | .167 | .155 | .062 | .053 | .094 | .030 | .019 | T8 | |
| 4 | .193 | .180 | .071 | .062 | .094 | .033 | .019 | T8 | |
| 6 | .254 | .240 | .097 | .087 | .111 | .035 | .022 | T10 | |
| 8 | .270 | .256 | .097 | .087 | .132 | .045 | .026 | T15 | |
| 10 | .322 | .306 | .115 | .105 | .155 | .055 | .031 | T20 | |
| 1/4 | .492 | .473 | .175 | .162 | .221 | .085 | .044 | T30 | |



HEAD & DRIVE DIMENSIONS FOR TRUSS PHILLIPS HIGH-LOW

| Nominal Size | A | | H | | M | N | G | | Driver Size |
|--------------|---------------|------|-------------|------|-----------------|--------------|---------------------------------|------|-------------|
| | Head Diameter | | Head Height | | Recess Diameter | Recess Width | Recess Penetration Gaging Depth | | |
| | Max | Min | Max | Min | Ref | Ref | Max | Min | |
| 4 | .226 | .211 | .061 | .051 | .104 | .018 | .059 | .042 | 1 |
| 6 | .289 | .272 | .078 | .066 | .122 | .019 | .078 | .060 | 1 |
| 8 | .321 | .303 | .086 | .074 | .152 | .027 | .073 | .048 | 2 |
| 10 | .384 | .364 | .102 | .088 | .166 | .029 | .088 | .063 | 2 |




HEAD & DRIVE DIMENSIONS FOR SIX-LOBE FLAT HIGH-LOW SCREWS

| Nominal Size | A | | H | R | G | | Fallaway | Driver Size |
|--------------|---------------|------|-------------|-----------------|--------------------------|------|----------|-------------|
| | Head Diameter | | Head Height | Recess Diameter | Recess Gauge Penetration | | | |
| | Max | Min | Ref | Ref | Max | Min | Max | |
| 2 | .162 | .144 | .051 | .069 | .056 | .040 | .014 | T6 |
| 4 | .212 | .191 | .067 | .094 | .082 | .066 | .019 | T8 |
| 6 | .262 | .238 | .083 | .111 | .095 | .072 | .022 | T10 |
| 8 | .312 | .285 | .100 | .132 | .110 | .087 | .026 | T15 |
| 10 | .362 | .333 | .116 | .155 | .125 | .102 | .031 | T20 |
| 1/4 | .477 | .442 | .153 | .200 | .154 | .131 | .044 | T27 |

HEAD DIMENSIONS High-Low Style

| HEAD & DRIVE DIMENSIONS FOR PHILLIPS PAN HIGH-LOW | | | | | | | | | |
|---------------------------------------------------|---------------|------|-------------|------|-----------------|------|---------------------------------|------|-------------|
| Nominal Size | A | | H | | M | | G | | Driver Size |
| | Head Diameter | | Head Height | | Recess Diameter | | Recess Penetration Gaging Depth | | |
| | Max | Min | Max | Min | Max | Min | Max | Min | |
| 2 | .167 | .155 | .062 | .053 | .104 | .091 | .052 | .034 | 1 |
| 3 | .167 | .155 | .062 | .053 | .104 | .091 | .052 | .034 | 1 |
| 4 | .193 | .180 | .071 | .062 | .112 | .099 | .061 | .043 | 1 |
| 5 | .219 | .205 | .080 | .070 | .122 | .109 | .071 | .053 | 1 |
| 6 | .254 | .240 | .097 | .087 | .158 | .145 | .072 | .046 | 2 |
| 7 & 8 | .270 | .256 | .097 | .087 | .166 | .153 | .080 | .055 | 2 |
| 10 | .322 | .306 | .115 | .105 | .182 | .169 | .097 | .071 | 2 |
| 12 | .373 | .357 | .133 | .122 | .199 | .186 | .113 | .089 | 2 |
| 1/4 | .492 | .473 | .175 | .162 | .281 | .268 | .144 | .118 | 3 |

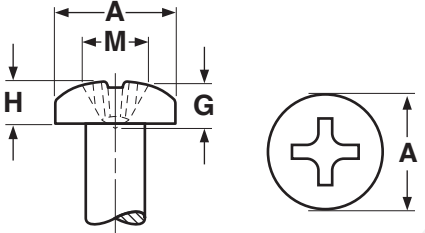

| HEAD & DRIVE DIMENSIONS FOR POZI PAN HIGH-LOW | | | | | | | | | |
|-----------------------------------------------|---------------|------|-------------|------|-----------------|---------------------------------|------|-------------|--|
| Nominal Size | A | | H | | M | G | | Driver Size | |
| | Head Diameter | | Head Height | | Recess Diameter | Recess Penetration Gaging Depth | | | |
| | Max | Min | Max | Min | Ref | Max | Min | | |
| 4 | .193 | .180 | .071 | .062 | .105 | .062 | .046 | 1 | |
| 6 | .254 | .240 | .097 | .087 | .155 | .076 | .058 | 2 | |
| 8 | .270 | .256 | .097 | .087 | .155 | .076 | .058 | 2 | |
| 10 | .322 | .306 | .115 | .105 | .170 | .092 | .074 | 2 | |

