


HEAD DIMENSIONS

Serrated Truss

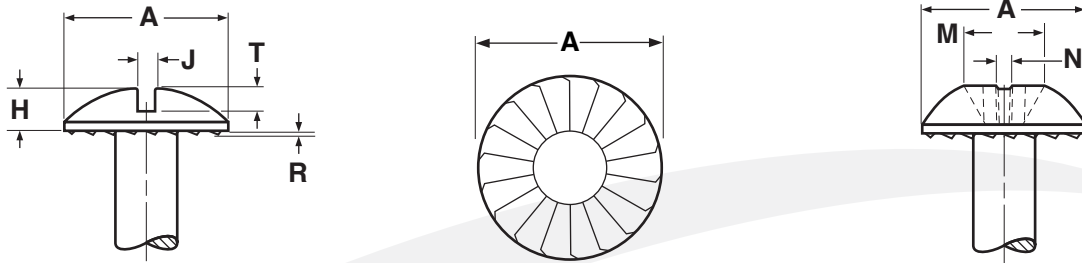

| TRUSS HEADS FOR MACHINE SCREWS | | | | | | | | | | | | |
|--------------------------------|---------------|------|----------------|------|---------------|------|---------------|------|-----------------|-------------------------|-------|----------------------|
| Nominal Size | A | | H | | J | | T | | M | R | | Phillips Driver Size |
| | Head Diameter | | Height of Head | | Width of Slot | | Depth of Slot | | Recess Diameter | Locking Serration Depth | | |
| | Max | Min | Max | Min | Max | Min | Max | Min | Ref | Max | Min | |
| 1/4 | .573 | .546 | .150 | .133 | .075 | .064 | .087 | .070 | .256 | .0015 | .0010 | 3 |
| 5/16 | .698 | .666 | .183 | .162 | .084 | .072 | .106 | .085 | .345 | .0015 | .0010 | 4 |