




TORX® DRIVE PAN HEADS								Camcar
Screw Size	D		H		R	G	Driver Size	
	Head Dimensions				Recess Dimensions			
	Head Diameter		Head Height		Ref	Gauge Penetration Min		(Fallaway) Max Penetration
	Max	Min	Max	Min				
2	.167	.155	.062	.053	.094	.030	.019	T8
4	.219	.205	.080	.070	.111	.035	.022	T10
6	.270	.256	.097	.087	.132	.045	.026	T15
8	.322	.306	.115	.105	.155	.055	.031	T20
10	.373	.357	.133	.122	.178	.070	.036	T25
12	.425	.407	.151	.139	.200	.070	.040	T27
1/4	.492	.473	.175	.162	.221	.085	.044	T30
5/16	.615	.594	.218	.203	.266	.105	.047	T40




PHILLIPS AND SLOTTED COMBINATION DRIVE PAN HEADS																
Nominal Screw Size	G		H		J		A		M		T		N	Recess Penetration Gaging Depth		Driver Size
	Head Dimensions				Slot Dimensions				Recess Dimensions							
	Head Diameter		Head Height		Width		Depth		Diameter		Depth		Width	Max	Min	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Ref			
4	.219	.205	.080	.070	.039	.031	.040	.030	.122	.109	.078	.060	.019	.071	.053	1
6	.270	.256	.097	.087	.048	.039	.050	.037	.166	.153	.091	.066	.028	.080	.055	2
7	.296	.281	.106	.096	.048	.039	.054	.041	.176	.163	.100	.074	.029	.089	.064	2
8	.322	.306	.115	.105	.054	.045	.058	.045	.182	.169	.108	.082	.030	.097	.071	2
10	.373	.357	.133	.122	.060	.050	.068	.053	.199	.186	.124	.100	.031	.113	.089	2
12	.425	.407	.151	.139	.067	.056	.077	.061	.259	.246	.141	.115	.034	.124	.098	3
1/4	.492	.473	.175	.162	.075	.064	.087	.070	.281	.268	.161	.135	.036	.144	.118	3

Self-Tapping Screws *Head Dimensions* Torx® Flat & Torx® Flat Undercut

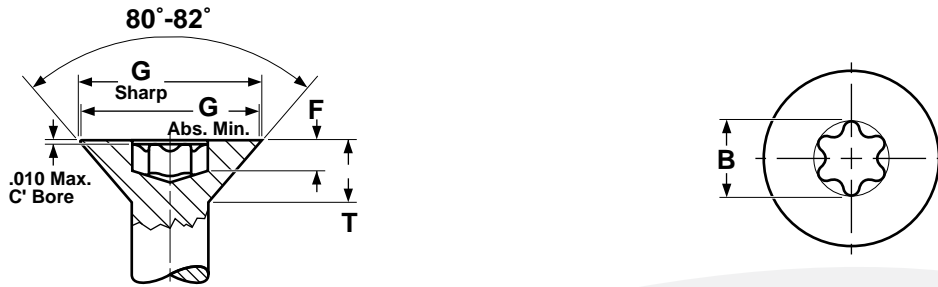

TORX® FLAT HEADS FOR SELF TAPPING SCREWS								Camcar
Nominal Size	G			T	B	F	Max Penetration of "No-Go" Gauge (Fallaway)	Torx® Driver Size
	Head Diameter			Head Height	Recess Diameter	Gauge Penetration		
	Max Sharp	Min Sharp	Abs Min	Ref	Ref	Min		
4	.225	.209	.195	.067	.094	.028	.019	T8
6	.279	.257	.244	.083	.111	.035	.022	T10
8	.332	.308	.292	.100	.132	.040	.026	T15
10	.385	.359	.340	.116	.155	.050	.031	T20
12	.438	.410	.389	.132	.178	.055	.036	T25
1/4	.507	.477	.452	.153	.200	.075	.040	T27

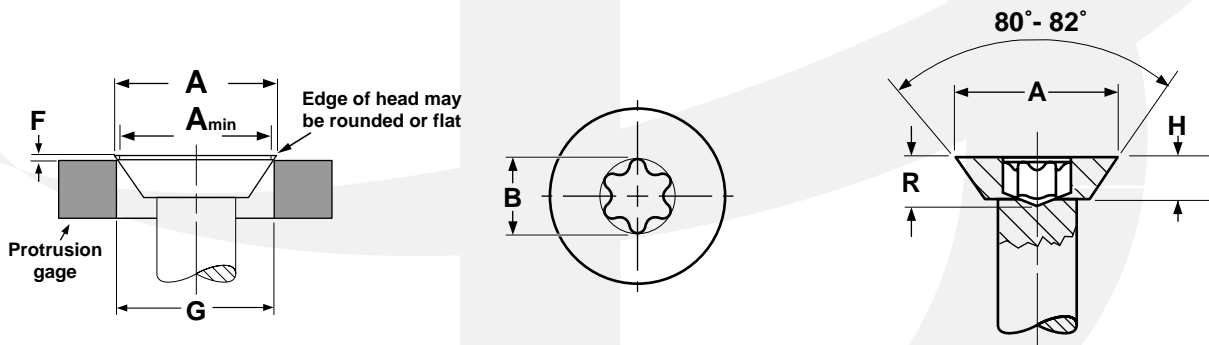

HEAD & DRIVE DIMENSIONS FOR TORX® FLAT UNDERCUT SELF TAPPING SCREWS									
Nominal Size	A		H	B		R	F		Driver Size
	Head Diameter		Head Height		Recess Diameter	Recess Penetration Gaging Depth	Protrusion Above Gaging Diameter		
	Max	Min	Max	Min	Ref	Min	Max	Min	
4	0.225	0.195	0.047	0.038	0.094	0.020	0.032	0.019	T8
6	0.279	0.244	0.059	0.048	0.111	0.024	0.036	0.021	T10
8	0.332	0.292	0.070	0.058	0.132	0.035	0.039	0.023	T15
10	0.385	0.340	0.081	0.068	0.155	0.045	0.042	0.025	T20
12	0.438	0.389	0.092	0.078	0.178	0.050	0.045	0.027	T25
1/4	0.507	0.452	0.107	0.092	0.200	0.055	0.050	0.029	T27

®Torx is a registered trademark of the Camcar Corporation, division of Textron Industries.