


Pan Head w/
Square Recess

TYPE-17 DEEP THREAD

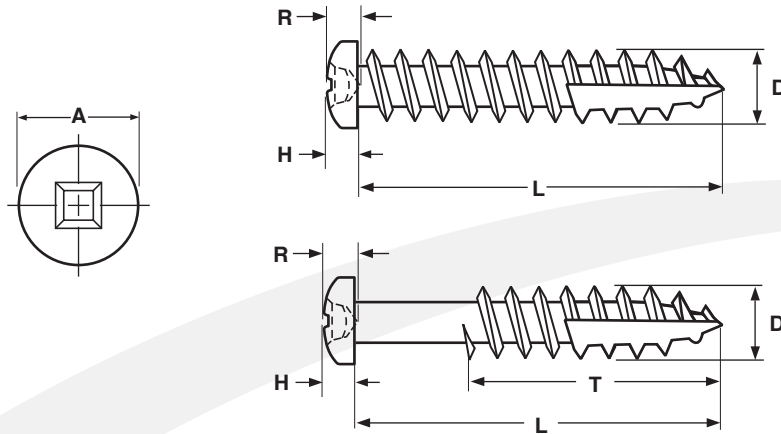

PAN SQUARE RECESS DEEP THREAD WOOD SCREW WITH TYPE-17 POINT											
Nominal Diameter	A		H		R		D		T		Recess Size
	Head Diameter		Head Height		Recess Depth		Major Diameter		Threaded Length		
	Max	Min	Max	Min	Max	Min	Max	Min	L ≤ 1"	L > 1"	
8	0.322	0.306	0.115	0.105	0.080	0.065	0.174	0.164	Full thread	2/3 thread	#2
Tolerance on Length	Up to 5/8"					+0 / -0.03					
	Over 5/8 to 1.5"					+0 / -0.05					
	Over 1.5 to 2.75"					+0 / -0.06					
	Over 2.75 to 5"					+0 / -0.09					

Description	An externally threaded fastener with a dome-shaped head, square recess and a single lead thread. The shank has a reduced diameter and a chip cavity cut out where the final several threads, ending at the tip.
Applications / Advantages	The deeper thread design offers greater resistance to pull-out forces as compared to standard wood screws. Popular in fastening cabinet hardware.
Material	C1018 - 1022 case-hardened steel
Surface Hardness	Vickers 450 HV minimum
Case Depth	0.004" - 0.009"
Torque	See values in above table
Plating	See Appendix-A for plating information